

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
16 October 2003 (16.10.2003)


PCT

(10) International Publication Number
WO 03/084879 A1

- (51) International Patent Classification⁷: C02F 1/32 (74) Agents: CHRISTENBURY, T., Daniel et al.; Piper Rudnick LLP, 3400 Two Logan Square, 18th and Arch Streets, Philadelphia, PA 19103-2762 (US).
- (21) International Application Number: PCT/US03/10000
- (22) International Filing Date: 1 April 2003 (01.04.2003) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/369,081 1 April 2002 (01.04.2002) US (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant (*for all designated States except US*): ONDEO DEGREMONT, INC. [US/US]; 2924 Emerywood Parkway, P.O. Box 71390, Richmond, VA 23255-1390 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): NEOFOTISTOS, Paris [US/US]; 931 Biggin Pond Road, Midlothian, VA 23114 (US).
- Published:
— with international search report

[Continued on next page]

(54) Title: APPARATUS FOR IRRADIATING FLUIDS WITH UV

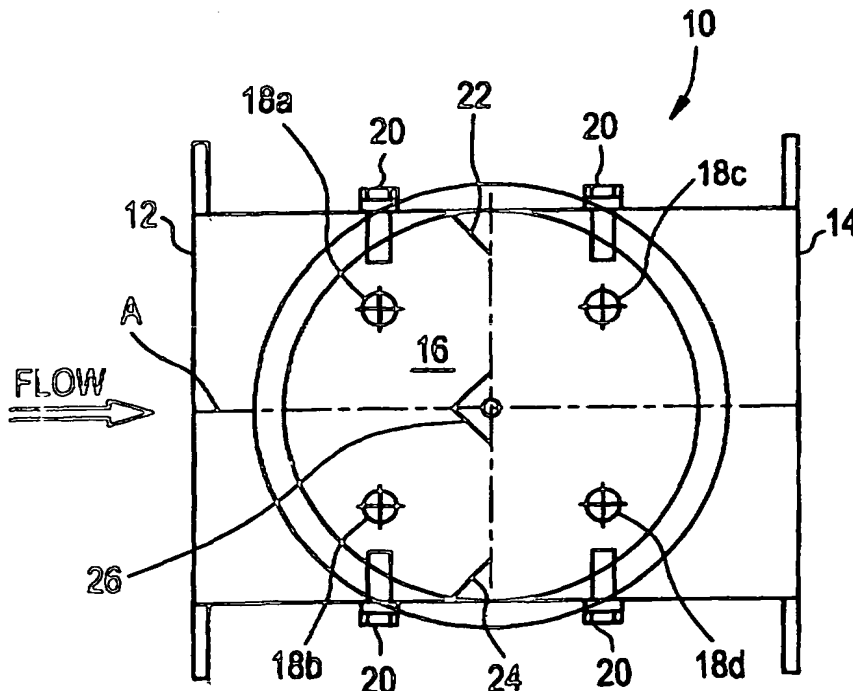

(57) Abstract: An apparatus for irradiating fluids with UV including a reactor vessel (10) having a fluid inlet (12), a fluid outlet (14) and a reaction chamber (16); a plurality of UV lamps (18a-d) extending across the reaction chamber (16) and substantially perpendicularly to an axis (A) extending between the fluid inlet (12) and the fluid outlet (14); an upper fluid diverter (22) and a lower fluid diverter (24) extending across the reaction chamber (16) substantially parallel to the lamps (18a-d) and positioned downstream of at least one upstream UV lamp (18a, b), wherein the upper and lower fluid diverters (22, 24) are positioned to direct fluids toward at least one UV lamp (18c, d) downstream of the upstream UV lamp (18a, b).